



**Draka**


Draka Cableteq | Marine, Oil & Gas International

Bostrig Type P

0807

Page 11 of 62

## BOSTRIG™ TYPE P CONTROL CABLE 600V OR 0.6/1kV

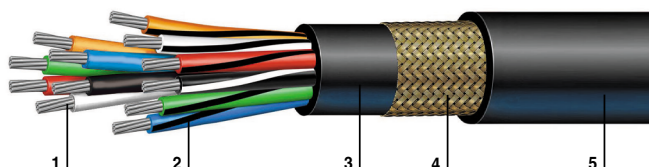

**Multi-conductor / armored and sheathed  
TYPE P CONTROL CABLE  
600V or 0.6/1kV  
18 AWG**

### Applications

Bostrig™ Type P Marine and Offshore Cable is primarily designed for power, control, signal and instrumentation applications for offshore, land rigs, marine vessels and oil and gas drilling rigs.

Bostrig cables have excellent resistance to oil, abrasion, moisture, sunlight and ester-based mud (Type P-MR). They are suitable for use in Class I, Division I and Zone I applications (armored & sheathed) and meet the crush and impact resistance requirements (C&IR) of UL 2225.

The standard insulation has a continuous operating temperature of 125°C allowing for higher ampacity levels. Larger diameter cables carry a new flexible design. They satisfy Transport Canada's cold bend at -40°C and cold impact at -35°C (CSA C 22.2 No. 0.3).

This product is readily available in an unarmored version.

### Approvals

ETL/Intertek Testing Services Listed as Marine Shipboard Cable in accordance with IEEE 45 (1998), IEEE 1580 (2001), UL 1309/CSA245 and the performance requirements of IEC 60092-3.

Det Norske Veritas Type Approval Certificates E8792, E8793, E8794, E8795 and E8796.

American Bureau of Shipping Approval Certificate 03-HS347018C/3-PDA.

Lloyds Registry of Shipping Approval Certificates No. 95/00161(E3) and 95-00162(E3)

Transport Canada Approved AMS400-20-2

Manufactured to BIW Specifying Standard J105

### Construction

1. Conductors	Soft annealed stranded tinned copper per ASTM B 33. A polyester tape separator is used over the conductor.
2. Insulation	Bostrig Type P chemically cross-linked polyolefin (XLPO), meeting IEEE 1580 (2001).
3. Jacket	Flame-retardant Arctic Neoprene, complying with Type N Neoprene as required in IEEE-1580 (2001). Thickness as shown on data sheet for unarmored version.
4. Armor	Braided bronze in accordance with IEEE 1580 (2001).
5. Sheath	Flame-retardant Arctic Neoprene applied over the armor, complying with Type N Neoprene as required in IEEE 1580 (2001). Thickness as shown in tables on opposite page.

### Features

- Superior resistance to oil, abrasion, moisture, sunlight, mud, crush and impact
- Meets IEEE standards for 600V / IEC standards for 0.6/1kV

### Ratings

Meets all test requirements of IEEE 1580 (2001) and the flame test in IEC 60332-3, Category A.

Listed by ETL per IEEE 1580 (2001), UL 1309/CSA 245 and IEEE 45 (1998) for 600V.

Bostrig Type P cables comply with the Crush and Impact requirements of UL 2225.



**www.DrakaMOG.com**

**BOSTRIG™ TYPE P CONTROL CABLE 600V or 0.6/1kV****multi-conductor / armored and sheathed****18 AWG / 600V or 0.6/1kV • 0.96 mm<sup>2</sup>**

Type Designation	Draka Number	Number of Conductors	Insulation Thickness in • mm	Sheath Thickness in • mm	Cable Diameter (nominal) in • mm	Cable Weight (approximate) Lbs/mft • Kg/km
C18PNBS-2	026249	2	.030 • 0.76	.060 • 1.5	.515 • 13.1	180 • 268
C18PNBS-3	026250	3	.030 • 0.76	.060 • 1.5	.540 • 13.7	200 • 298
C18PNBS-4	026251	4	.030 • 0.76	.060 • 1.5	.575 • 14.6	225 • 335
C18PNBS-5	026252	5	.030 • 0.76	.060 • 1.5	.605 • 15.4	250 • 372
C18PNBS-6	026253	6	.030 • 0.76	.060 • 1.5	.640 • 16.3	275 • 409
C18PNBS-7	026254	7	.030 • 0.76	.060 • 1.5	.640 • 16.3	285 • 424
C18PNBS-8	026255	8	.030 • 0.76	.060 • 1.5	.670 • 17.1	310 • 461
C18PNBS-10	026256	10	.030 • 0.76	.060 • 1.5	.750 • 19.1	365 • 543
C18PNBS-12	026257	12	.030 • 0.76	.060 • 1.5	.765 • 19.1	365 • 543
C18PNBS-16	026258	16	.030 • 0.76	.080 • 2.0	.885 • 22.5	500 • 744
C18PNBS-20	026259	20	.030 • 0.76	.080 • 2.0	.935 • 23.8	580 • 863
C18PNBS-24	026260	24	.030 • 0.76	.080 • 2.0	1.010 • 25.7	655 • 975
C18PNBS-30	026261	30	.030 • 0.76	.080 • 2.0	1.100 • 27.9	790 • 1176
C18PNBS-37	026262	37	.030 • 0.76	.080 • 2.0	1.165 • 29.6	900 • 1339
C18PNBS-44	026263	44	.030 • 0.76	.080 • 2.0	1.275 • 32.4	1035 • 1540
C18PNBS-60	026264	60	.030 • 0.76	.110 • 2.8	1.445 • 36.7	1355 • 2016
C18PNBS-91	026265	91	.030 • 0.76	.110 • 2.8	1.650 • 41.9	1860 • 2768

Control cables are not intended for continuous current carrying applications. The current limit on these cables should be for providing control functions through relays and switching devices. The maximum current for any one conductor should not exceed the value Table 3 for three conductor cables. The average of all conductors should not exceed the limit based on the total number of conductors in the cable taken from Table 4 multiplied by the ampacity from Table 3.

This information is provided for reference only, please consult the factory or your representative to confirm all engineering information,

This information is not meant to replace the information in the appropriate and applicable standard or code.

Table 3

Three Conductor Cable, four Conductor

Cables with three Current Carrying

Conductors 45°C Ambient

Conductor Size					
Gauge	CMA	mm <sup>2</sup>	95°C	100°C	110°C
18	1,620	0.82	11	12	13

Table 4

Cables with more than four Current Carrying Conductors

No of Conductors	Derating Factor from 3 Conductor Ampacity
4-6	0.8
7-9	0.7
10-20	0.5
21-30	0.45
31-40	0.40
41-60	0.35
61 and greater	0.30