



Draka


Draka Cableteq | Marine, Oil & Gas International

Bostrig Type P

0807

Page 41 of 62

BOSTRIG™ TYPE P CONTROL CABLE 600V OR 0.6/1kV

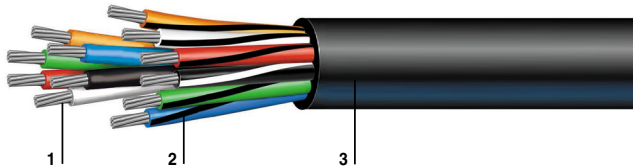

Multi-conductor / unarmored
TYPE P CONTROL CABLE
600V or 0.6/1kV
12 & 10 AWG

Applications

Bostrig™ Type P Marine and Offshore Cable is primarily designed for power, control, signal and instrumentation applications for offshore, land rigs, marine vessels and oil and gas drilling rigs.

Bostrig cables have excellent resistance to oil, abrasion, moisture, sunlight and ester-based mud (Type P-MR).

The standard insulation has a continuous operating temperature of 125°C allowing for higher ampacity levels. Larger diameter cables carry a new flexible design. They satisfy Transport Canada's cold bend at -40°C and cold impact at -35°C (CSA C 22.2 No. 0.3).

This product is readily available in an armored and sheathed version.

Approvals

ETL/Intertek Testing Services Listed as Marine Shipboard Cable in accordance with IEEE 45 (1998), IEEE 1580 (2001), UL 1309/CSA245 and the performance requirements of IEC 60092-3.

Det Norske Veritas Type Approval Certificates E8792, E8793, E8794, E8795 and E8796.

American Bureau of Shipping Approval Certificate 03-HS347018C/3-PDA.

Lloyds Registry of Shipping Approval Certificates No. 95/00161(E3) and 95-00162(E3)

Transport Canada Approved AMS400-20-2

Manufactured to BIW Specifying Standard J105

Construction

1. Conductors	Soft annealed stranded tinned copper per ASTM B 33. A polyester tape separator is used over the conductor.
2. Insulation	Bostrig Type P chemically cross-linked polyolefin (XLPO), meeting IEEE 1580 (2001).
3. Jacket	Flame-retardant Arctic Neoprene, complying with Type N Neoprene as required in IEEE-1580 (2001). Thickness as shown in tables on opposite page.

Features

- Superior resistance to oil, abrasion, moisture, sunlight, mud, crush and impact
- Meets IEEE standards for 600V / IEC standards for 0.6/1kV

Ratings

Meets all test requirements of IEEE 1580 (2001) and the flame test in IEC 60332-3, Category A.

Listed by ETL per IEEE 1580 (2001), UL 1309/CSA 245 and IEEE 45 (1998) for 600V.

Bostrig Type P cables comply with the Crush and Impact requirements of UL 2225.



www.DrakaMOG.com

Subject to change without prior notice

DUSA_MOG41_0807



BOSTRIG™ TYPE P CONTROL CABLE 600V OR 0.6/1kV

multi-conductor / unarmored 12 & 10 AWG / 600V or 0.6/1kV

12 AWG • 3.08 mm²

Type Designation	Draka Number	Number of Conductors	Insulation Thickness in • mm	Sheath Thickness in • mm	Cable Diameter (nominal) in • mm	Cable Weight (approximate) Lbs/mft • Kg/km
C12PN-2	026224	2	.030 • 0.76	.060 • 1.5	.425 • 10.8	100 • 149
C12PN-3	026225	3	.030 • 0.76	.060 • 1.5	.440 • 11.2	135 • 201
C12PN-4	026226	4	.030 • 0.76	.060 • 1.5	.475 • 12.1	155 • 231
C12PN-5	026227	5	.030 • 0.76	.060 • 1.5	.525 • 13.3	190 • 283
C12PN-6	026228	6	.030 • 0.76	.060 • 1.5	.570 • 14.5	220 • 327
C12PN-7	026229	7	.030 • 0.76	.060 • 1.5	.570 • 14.5	245 • 365
C12PN-8	026230	8	.030 • 0.76	.060 • 1.5	.620 • 15.6	280 • 417
C12PN-10	026231	10	.030 • 0.76	.060 • 1.5	.720 • 18.3	355 • 528
C12PN-12	026232	12	.030 • 0.76	.060 • 1.5	.745 • 18.9	400 • 595
C12PN-16	026233	16	.030 • 0.76	.080 • 2.0	.865 • 22.0	550 • 818
C12PN-20	026234	20	.030 • 0.76	.080 • 2.0	.955 • 24.3	680 • 1012
C12PN-24	026235	24	.030 • 0.76	.080 • 2.0	1.060 • 26.9	795 • 1183
C12PN-30	026236	30	.030 • 0.76	.080 • 2.0	1.120 • 28.5	955 • 1421
C12PN-37	026237	37	.030 • 0.76	.080 • 2.0	1.210 • 30.7	1140 • 1697
C12PN-44	026238	44	.030 • 0.76	.080 • 2.0	1.355 • 34.4	1390 • 2069
C12PN-60	026239	60	.030 • 0.76	.110 • 2.8	1.565 • 39.8	1880 • 2798
C12PN-91	026240	91	.030 • 0.76	.125 • 3.2	1.880 • 47.8	2800 • 4167

10 AWG • 5.53 mm²

Type Designation	Draka Number	Number of Conductors	Insulation Thickness in • mm	Sheath Thickness in • mm	Cable Diameter (nominal) in • mm	Cable Weight (approximate) Lbs/mft • Kg/km
C10PN-2	026241	2	.030 • 0.76	.060 • 1.5	.490 • 12.5	115 • 171
C10PN-3	026242	3	.030 • 0.76	.060 • 1.5	.520 • 13.2	200 • 298
C10PN-4	026243	4	.030 • 0.76	.060 • 1.5	.565 • 14.4	240 • 357
C10PN-5	026244	5	.030 • 0.76	.060 • 1.5	.620 • 15.8	295 • 439
C10PN-6	026245	6	.030 • 0.76	.060 • 1.5	.675 • 17.2	350 • 521
C10PN-7	026246	7	.030 • 0.76	.060 • 1.5	.675 • 17.2	390 • 580
C10PN-8	026247	8	.030 • 0.76	.060 • 1.5	.730 • 18.5	445 • 662
C10PN-10	026248	10	.030 • 0.76	.080 • 2.0	.895 • 22.7	590 • 878

Control cables are not intended for continuous current carrying applications. The current limit on these cables should be for providing control functions through relays and switching devices. The maximum current for any one conductor should not exceed the value Table 3 for three conductor cables. The average of all conductors should not exceed the limit based on the total number of conductors in the cable taken from Table 4 multiplied by the ampacity from Table 3.

This information is provided for reference only, please consult the factory or your representative to confirm all engineering information,

This information is not meant to replace the information in the appropriate and applicable standard or code.

Table 3

Three Conductor Cable, four Conductor

Cables with three Current Carrying

Conductors 45°C Ambient

Conductor Size Gauge	CMA	mm ²	95°C	100°C	110°C
12	6,503	3.30	26	31	33
10	10,908	5.53	37	41	44

Table 4

Cables with more than four Current Carrying Conductors

No of Conductors	Derating Factor from 3 Conductor Ampacity
4-6	0.8
7-9	0.7
10-20	0.5
21-30	0.45
31-40	0.40
41-60	0.35
61 and greater	0.30