


DRAWN BY: CFT	REVISED BY: GFG	APPROVED BY: GFG	REVISION:	PART No.	1/1
DATE: 08/02/10	DATE: 08/02/10	DATE: 08/02/10	1	6055	

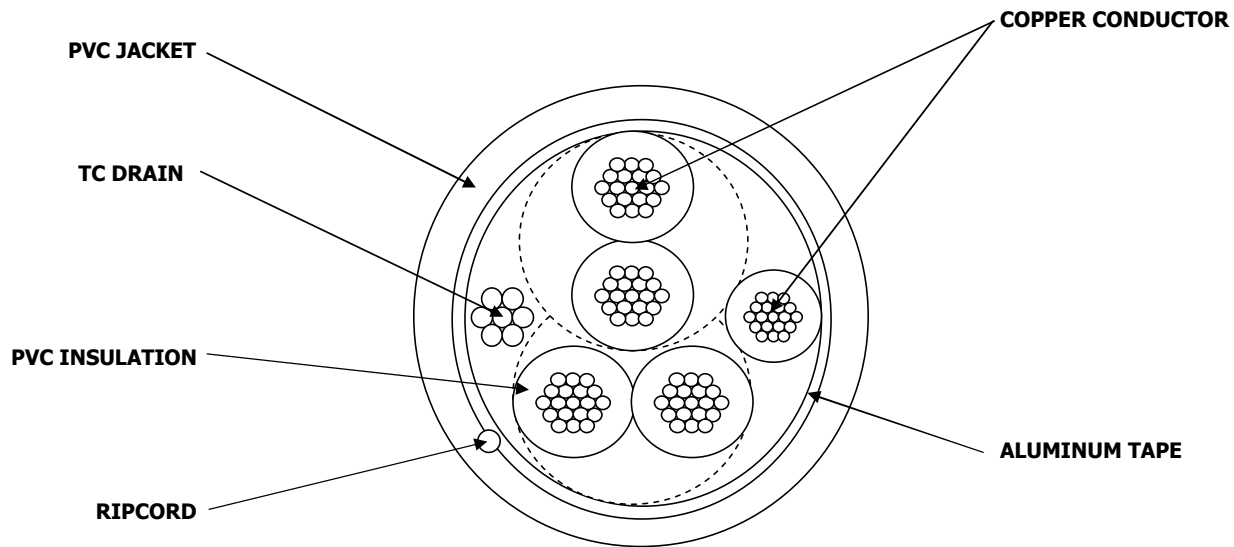

NOTE : DRAWING NOT ON SCALE , ONLY FOR REFERENCE

PRODUCT INFORMATION

CONDUCTOR 1	Material	Copper (Cu)
	Size	16 AWG
	Stranding	26H30AWG
	Nominal External Diameter	0.058" ± 0.001"
CONDUCTOR 2	Material	Copper (Cu)
	Size	22 AWG
	Stranding	7H30AWG
	Nominal External Diameter	0.030" ± 0.001"
INSULATION	Material	PVC
	Nominal Thicknes	0.021"
	Nominal External Diameter	0.100" ± 0.002"
	Color	Black/White & Black/White + Orange
ASSEMBLY	Number of Conductors	2P + 1C
	Shield	Aluminum Tape
	Drain Material	Tinned Copper (CuSn)
	Size	16 AWG
	Stranding	26H30AWG
	Ripcord	Yes
JACKET	Material	PVC
	Nominal Thicknes	0.053"
	Nominal External Diameter	0.0436" ± 0.0002"
	Color	Black
PACK	Type	REEL
	Quantity	500 M
CERTIFICATION		UL Styles (1569 / 2464)